


**Tiltall**

MP/MPC - 284/315

Tiltall MP Series Monopods

# 4/5-section aluminum/ carbon monopod

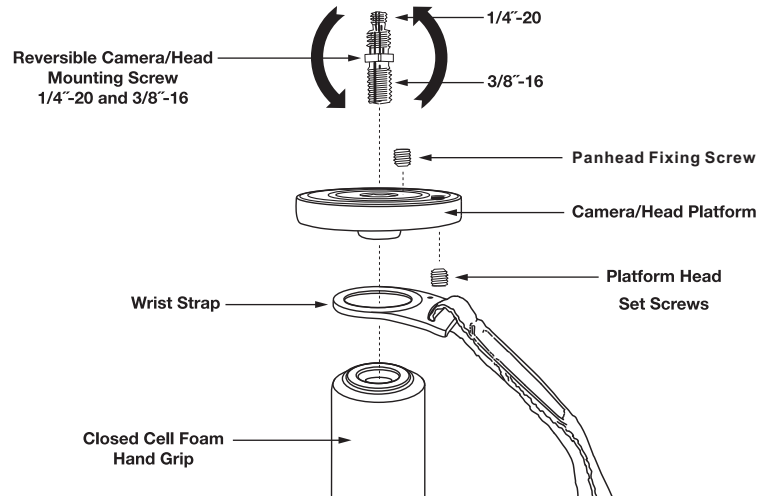

### Camera And Head Mounting Instructions For Tiltall MP Series Monopods

Your monopod is shipped from the factory with the standard 1/4"-20 reversible camera/head mounting screw in position. Refer to illustration above. To change to 3/8"-16, remove the protective thread cap on the mounting screw by turning counter-clockwise. Set aside. Next, remove the camera/head platform and wrist strap by turning counter-clockwise. Remove and flip the mounting screw 180° and reposition through camera/head platform and wrist strap. Note: The wrist strap bracket should be angled downward when positioned on top of the hand grip. Tighten-down assembly to monopod by turning platform clockwise.

### Mounting a Camera Directly to the Platform

Determine which half of the reversible camera/head mounting screw is needed for your camera. Mount by using steps as outlined above. Position your camera over the mounting screw and secure to platform by turning monopod clockwise.

### Mounting a Head to the Platform

Most heads are 3/8"-16 threaded. therefore, start with 3/8"-16 mounting screw secured in position. Position the head over mounting screw and secure by turning monopod clockwise. Next, tighten-down head platform set screw [located on the underside of the platform] by using a metric hex wrench and turning clockwise. Mount camera to the head using the steps listed above.

**WARNING! DO NOT OVER TIGHTEN SCREWS WHEN MOUNTING YOUR CAMERA OR HEAD TO THE MONOPOD. THIS CAN CAUSE PERMANENT DAMAGE TO THE MONOPOD AND OTHER EQUIPMENT.**

### Features include:

- 4/5-section legs with non-slip rubber leg locks
- Made of aluminum/ carbon and aircraft alloy materials
- Rubber feet with retractable stainless steel spikes
- Foam leg cover offer over-the shoulder carrying comfort

**A STRONG, LIGHTWEIGHT MONOPOD PERFECT FOR POINT-AND-SHOOT AND DSLR CAMERAS.**



### Specifications

Note: Weight not includes ball head. Height specifications listed are for monopod only.

Model No.	Section	Extended (mm)	Folded (mm)	Weight (kg)	Max. Load (kg)	Min. D (mm)	Max. D (mm)
MP-284C	4	1620	510	0.38	12	19	29
MP-315C	5	1865	495	0.39	15	19	32.5
MP-284	4	1620	510	0.49	11	19	29
MP-315	5	1865	495	0.56	14	19	32.5

\*The maximum load rating listed above was determined by a series of tests in a controlled environment. Although conservative, this rating should be used only as a guideline. Our tests found the Tiltall Monopods exceeded this rating for most applications. Care should always be taken when considering shooting location, or the use of long lenses or heavy equipment.

Contents: One four/five-section monopod, and a carrying case with shoulder strap.